

*Fig. 1*

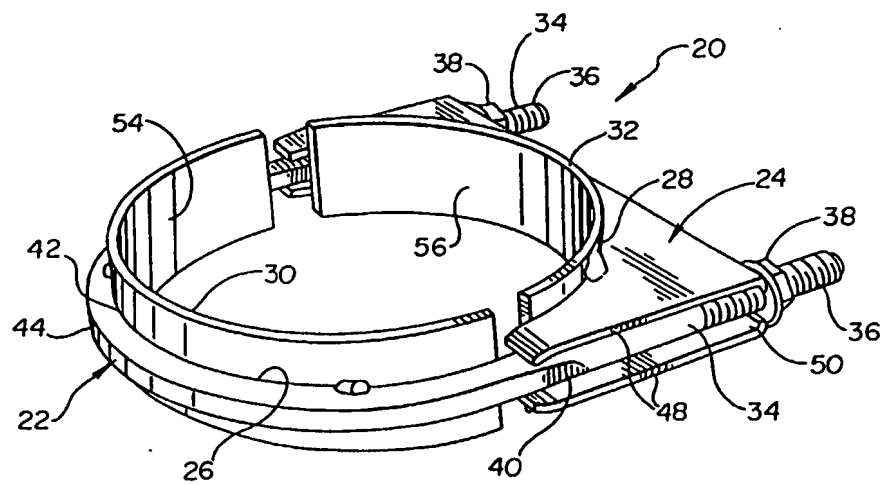


Fig. 3



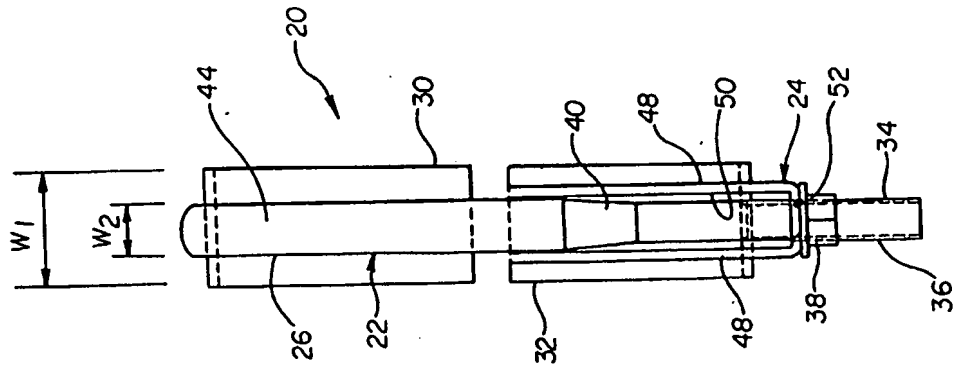



Fig. 2

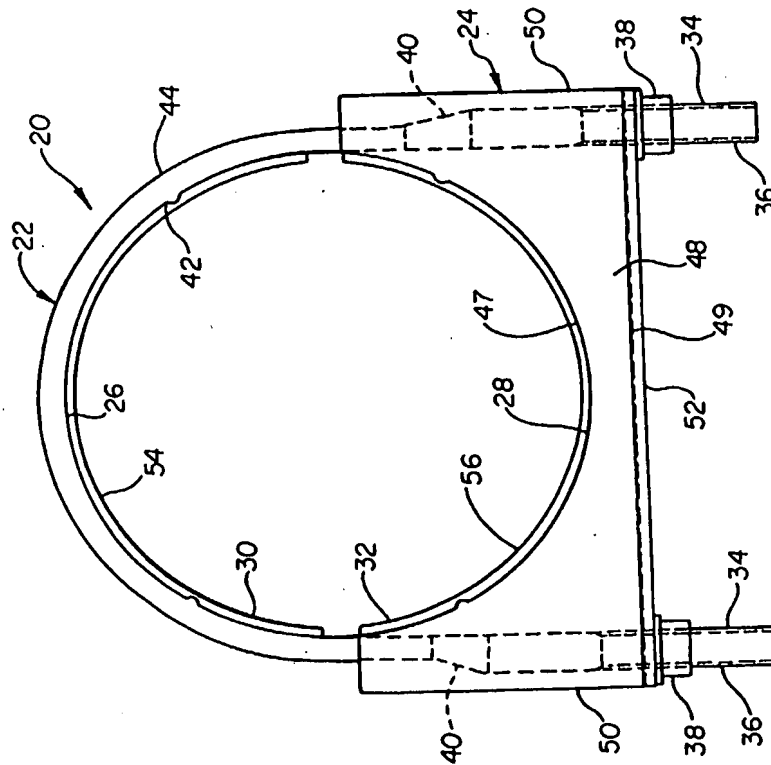


*Fig. 4*

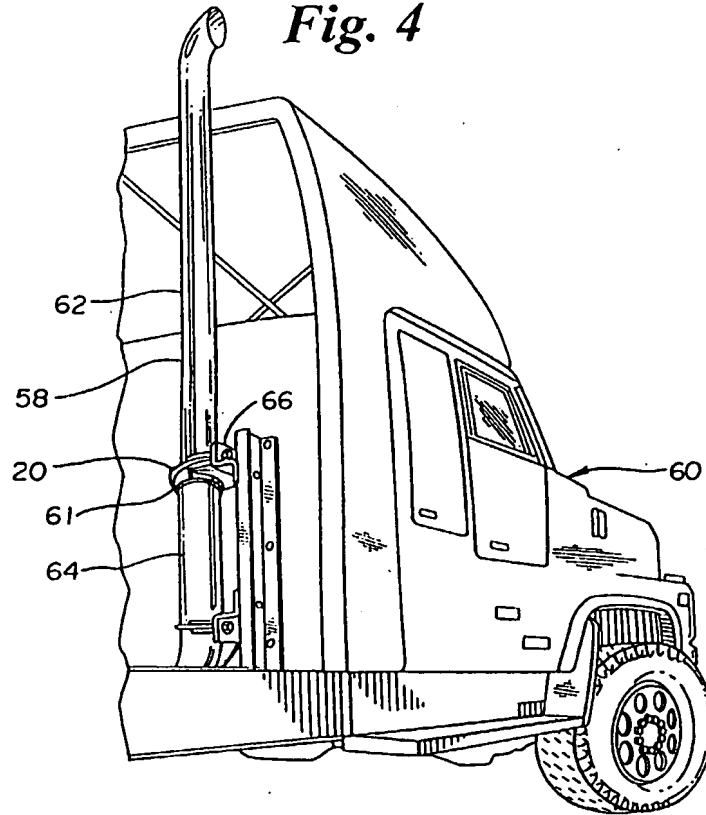

**Fig. 5**

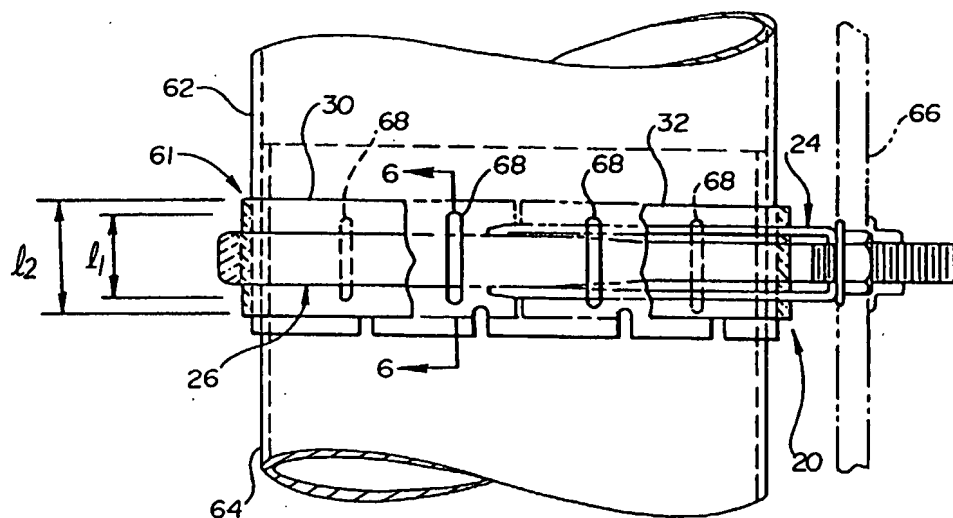


**Fig. 6**

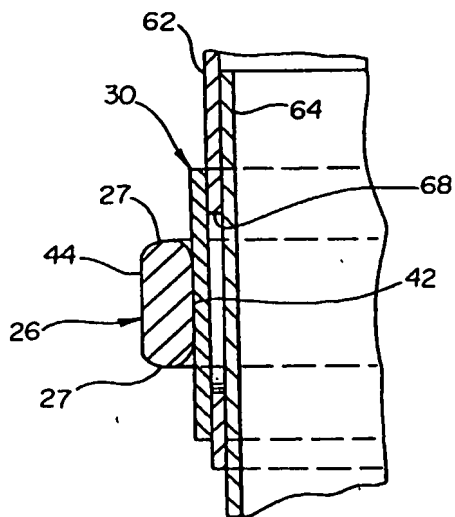





**Fig. 9**

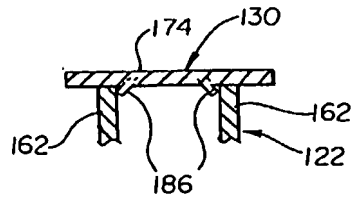

**Fig. 10**

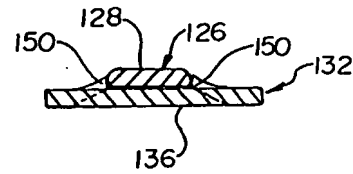

**Fig. 11**

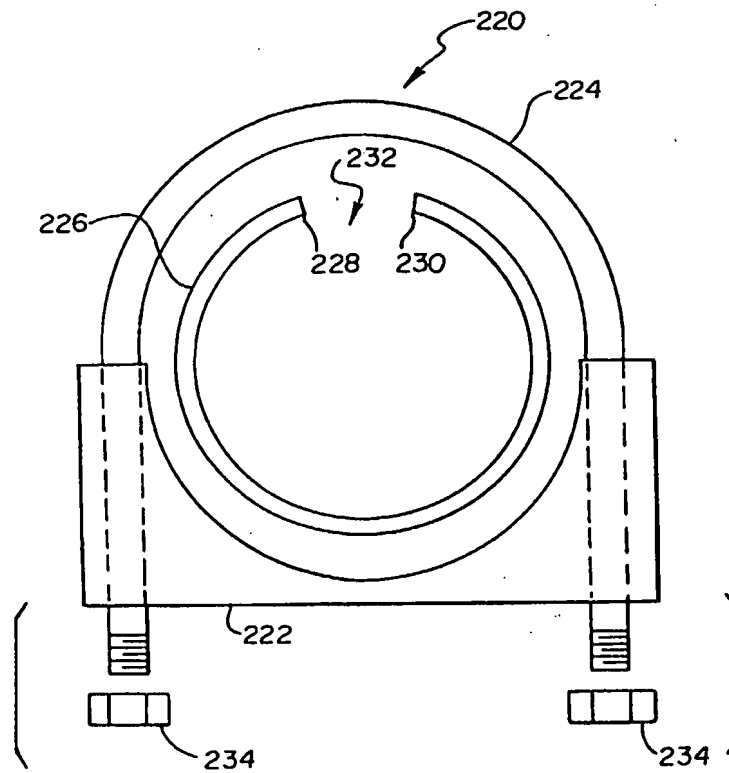

*Fig. 12*

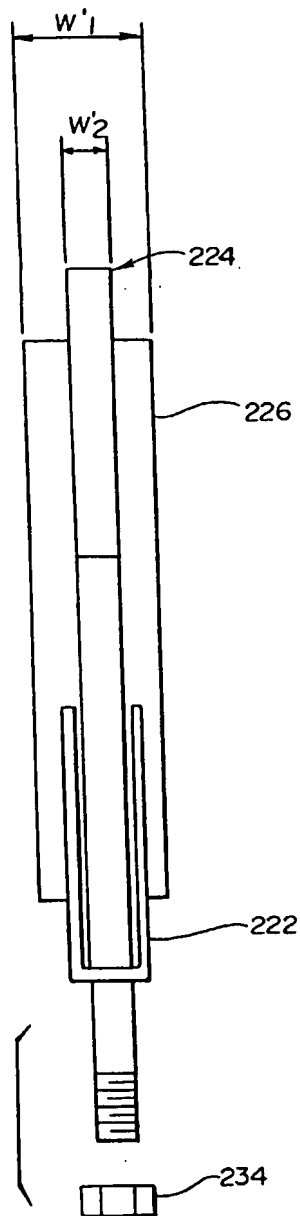


Fig. 13

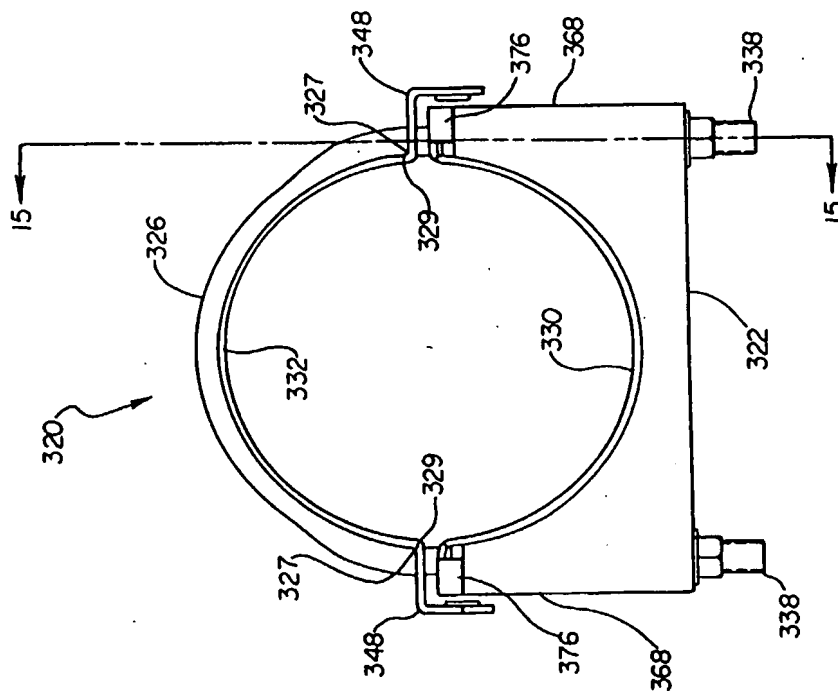


Fig. 14

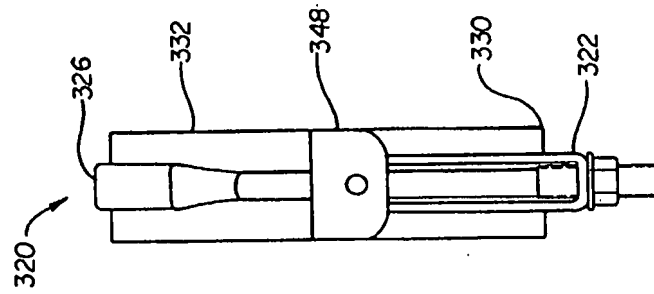
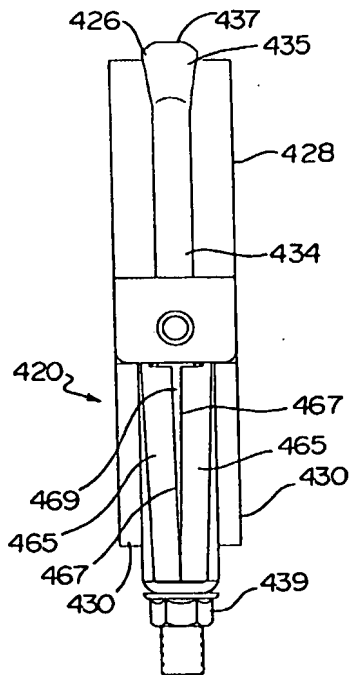




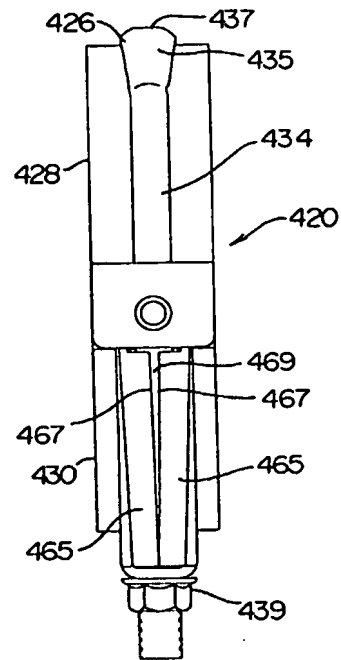


FIG. 10 is a cross-sectional view of a second embodiment of the device. It features a circular chamber 420 with an inner wall 428 and an outer wall 437. The chamber is supported by a base 462. On the left and right sides, there are vertical supports 463. At the top, there are components 448 and 435. At the bottom, there are components 434 and 439. Internal components include 471, 473, 477, 479, and 464.


**Fig. 19**




**Fig. 20**




**Fig. 21**

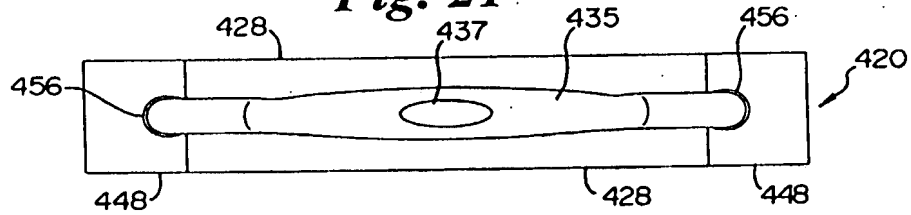

**Fig. 22**

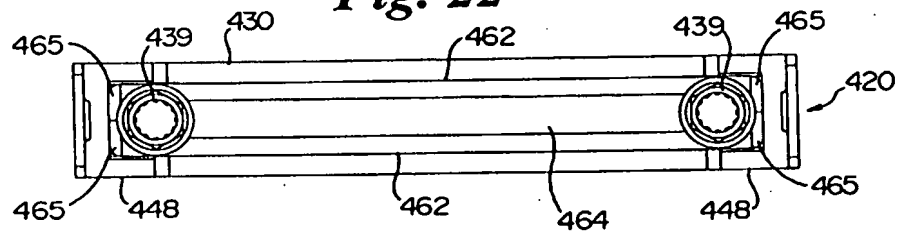

**Fig. 23**

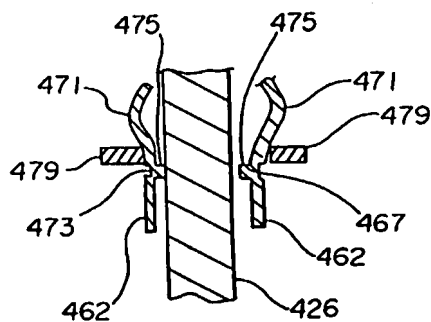

**Fig. 24**

